


## **LEDaLITE**

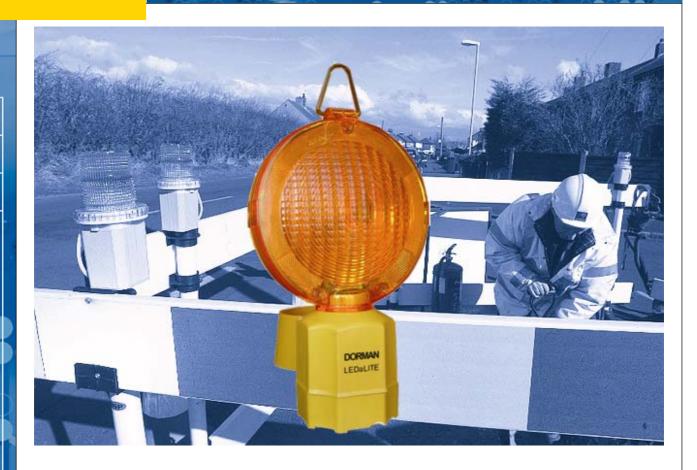

R O D U C T D A T A S H E E T

CODE


## LEDaLITE

## **Benefits Include**

- > 2 LEDs provide high intensity light source
- Tough polypropylene body provides high strength
- > Tough, high impact resistant polycarbonate bi-directional lens designed to give maximum light output incorporates retro-reflective ring and hanging fixture
- Key operated on/off switch is tamper proof.
  Can be switched from steady to flashing mode
- > Compact, single battery design requires

Robust, economical hazard warning lamp for night operation

- Air alkaline batteries may be fitted to greatly extend battery life. The orientation of the battery can be in any direction making replacement quick and easy.
- Optional easy fix cone mounting and scaffold fixing available
- Battery life approximately 122 hours steady operation, approximately 444 hours flashing
- > Automatic photocell switching extends battery life
- Complies with BS3142 Part 2 and BS EN 13252:2000

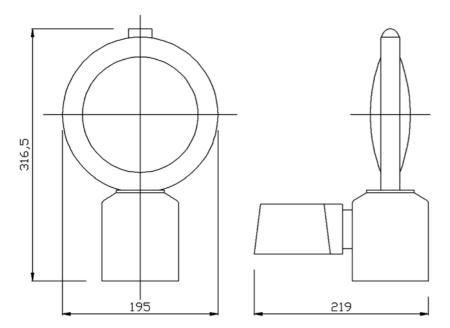

Weight (excluding battery) Standard zinc carbon battery DAAB25 air alkaline battery DAAB50 air alkaline battery 642g 540g (each) 640g (each) 740g (each)

Flash rate - 60 flashes/min

 $\propto$ DORMAN Rufford Road Crossens Southport PR9 8LA T: +44 (0)1704 220911 F: +44 (0)1704 232221 E: sales@dorman.co.uk www.dorman.co.uk Certificate No. FM14371

CODE

Ш Т

DA



Jan08